# AKP ADAPTER PLATE/MICROSOFT® KEYBOARD) Installation Instructions

#### **Parts List**

AKP arm/adapter plate assembly with hardware Three (3)#6 X 5/8" cross-recess (Phillips™) screws

# **Tools Required**

Power driver with cross-recess (Phillips™) bit

## Installation

- 1. Install AKP assembly to underside of work surface according to instructions provided with AKP.
- 2. Remove three (3) cross-recess screws from holes indicated in underside of Microsoft® keyboard (Fig. 1).

3. Set keyboard on adapter plate, aligning three holes in underside of keyboard with two recessed holes and one bracket hole in adapter plate. Attach keyboard to adapter plate using three (3) #6 x 5/8" cross-recess screws provided (Fig. 1).

See page 2 of 2 for field installation of adapter

plate to existing AKP.

CUSTOMER SERVICE PHONE: 1-800-426-8562

Page: 1 OF 2 Part No: 7021-7058 Rev. A

FIG. 1 ATTACH MICROSOFT KEYBOARD

TO ADAPTER PLATE

#6 x 5/8" LONG CROSS-RECESS

SCREWS (3)

# AKP ADAPTER PLATE (FOR USE WITH MICROSOFT® KEYBOARD) RETROFIT FIELD INSTALLATION Installation Instructions

# Parts List (Fig. 2)

AKP adapter plate
Four (4) 3/8" long, flathead, self-locking
(PEM™) screws
Four (4) self-locking hex nuts
Three (3)#6 X 5/8" cross-recess
(Phillips™) screws

# **Tools Required**

Power driver with reverse drive and cross-recess (Phillips™) bit 3/8" Wrench

## Installation

- 1. Remove four (4) 1/2" long cross-recess screws from underside of existing AKP arm (Fig. 2).
- 2. Attach retrofit adapter plate to AKP arm using four (4) Pem® screws and four (4) self-locking hex nuts (Fig. 3).
- 3. Remove three (3) cross-recess screws from holes indicated in underside of Microsoft® keyboard (Fig. 4).
- 4. Set keyboard on adapter plate, aligning holes. Attach keyboard to adapter plate using three (3) #6 x 5/8" cross-recess screws (Fig. 4).

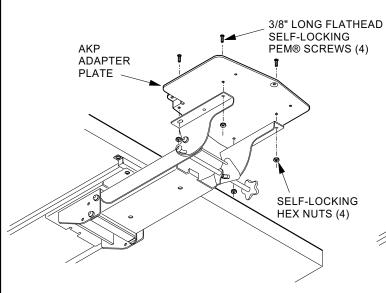


FIG. 3 ATTACH ADAPTER PLATE

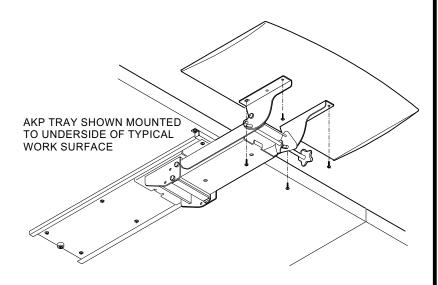


FIG. 2 REMOVE EXISTING AKP TRAY

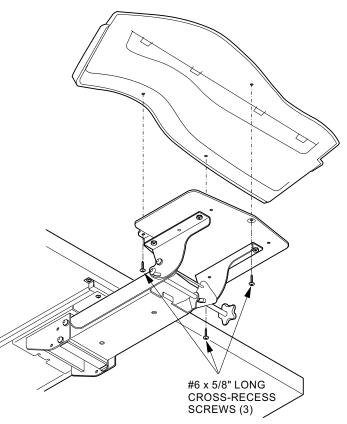


FIG. 4 ATTACH MICROSOFT KEYBOARD TO ADAPTER PLATE

CUSTOMER SERVICE PHONE: 1-800-426-8562

Page: 2 OF 2 Part No: 7021-7058 Rev. A